

**Product:** Sumo Hi Bulk

**Category:** Folio Papers - Boards

**Country of Origin:** China


## Technical specifications:

	Unit	Standard	Tolerance	Nominal								
Grammage	g/m <sup>2</sup>	ISO 536	± 3.0%	210	230	250	260	280	300	330	350	370
Caliper	µm	ISO 534	± 15%	325	355	400	410	450	500	550	585	600
Stiffness Taber 15° CD	Mn.m	ISO 2493	≥	3.5	4.1	5.1	5.2	7.3	9.3	12.3	13.8	15.3
Stiffness Taber 15° MD	Mn.m	ISO 2493	≥	6.3	7.7	9.5	9.8	13.4	17.2	22.6	25.2	27.9
Cobb value (60s)	g/m <sup>2</sup>	ISO 535	≤	PS:45 - RS:50								
Brightness R457	%	ISO 2470	-	P 91.0±3.0(WITH OBA); RS: 90.0±3.0(WITH OBA)								
Gloss	%	ISO 8254-1	≥	85								
PPS (10kgf)	µm	ISO 8791-4	≤	1.3								
IGT Blister	m/s	ISO 3783	≥	1.2								
Moisture	%	ISO 287	-	6.0 ~ 9.5								
Plybond	J/m <sup>2</sup>	TAPPI T569	≥	120								

Testing condition: (23±1) °C & (50±1)%

### Structure

- Triple coating
- Bleached chemical pulp
- BCTMP
- Bleached chemical pulp
- Light coating

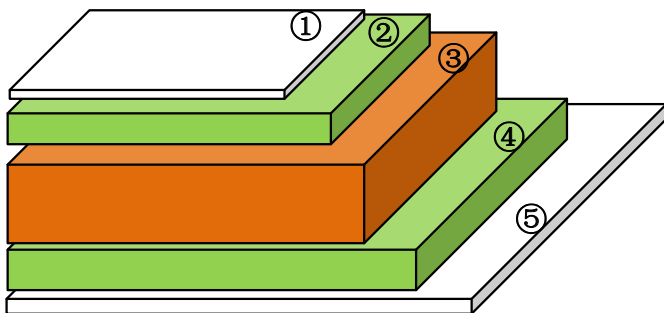

### Applications

- General Packaging
- Graphic & general retail applications

### Feature

- Food contact: Compliant to US FDA176.170 & ISEGA tested NO.42972U16
- Compliant for food contact